

Model: 45RZ


KOHLER POWER SYSTEMS

Gas/Gasoline



Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- All generator sets and components are prototype tested, factory built, and production tested.
- Generator sets provide one-step load acceptance per NFPA 110.
- A one-year limited warranty covers all systems and components. Two-, five-, and ten-year extended warranties are available.
- Generator features:
 - Kohler's unique Fast-Response™ excitation system delivers the fastest voltage response in the industry.
 - Brushless, rotating-field generator has broadrange reconnectability.
 - Kohler's permanent magnet excited generator (PMG) provides superior short-circuit capability.
- Other features:
 - Controllers are available to meet all applications. See controller features inside.
 - Low coolant level shutdown protects generator set from overheating.
 - Integral vibration isolation eliminates the need for installation of vibration spring isolators under the unit.
 - Electronic, isochronous governor provides precise frequency regulation.

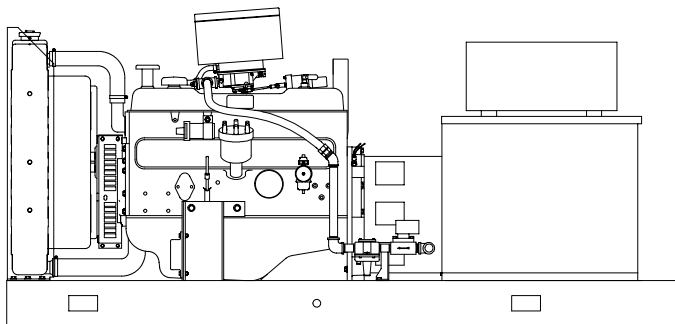

Generator Ratings

Model Series	Voltage Code	Voltage	Standby Amps Gasoline	Phase	Hz	Generator Model	Standby Ratings, kW/kVA			Prime Power, kW/kVA		
							Nat. Gas	LP Gas	Gasoline	Nat. Gas	LP Gas	Gasoline
45RZ	01	120/240	135	3	60	4P7B	39/49	43/54	45/56	35/44	39/49	41/51
45RZ	51	139/240	135	3	60	4P7B	40/50	44/55	45/56	36/45	40/50	41/51
45RZ	51	127/220	148	3	60	4P7B	39/49	43/54	45/56	35/44	39/49	41/51
45RZ	61	120/240	171	1	60	4P7B	35/35	39/39	41/41	32/32	35/35	37/37
45RZ	71	277/480	68	3	60	4P7B	40/50	44/55	45/56	36/45	40/50	41/51
45RZ	71	220/380	85	3	60	4P7B	39/49	43/54	45/56	35/44	39/49	41/51
45RZ	81	120/208	156	3	60	4P7B	39/49	43/54	45/56	35/44	39/49	41/51
45RZ	91	347/600	54	3	60	4P7B	40/50	44/55	45/56	36/45	40/50	41/51
45RFZ	01	110/220	125	3	50	4P7B	32/40	36/45	38/48	29/36	33/41	35/44
45RFZ	51	110/190	144	3	50	4P7B	32/40	36/45	38/48	29/36	33/41	35/44
45RFZ	61	110/220	159	1	50	4P7B	30/30	33/33	35/35	27/27	30/30	32/32
45RFZ	71	220/380	72	3	50	4P7B	32/40	36/45	38/48	29/36	33/41	35/44
45RFZ	71	230/400	69	3	50	4P7B	32/40	36/45	38/48	29/36	33/41	35/44
45RFZ	71	240/416	66	3	50	4P7B	33/41	37/46	38/48	30/38	34/43	35/44
45RFZ	81	120/208	132	3	50	4P7B	33/41	37/46	38/48	30/38	34/43	35/44

RATINGS: Standby ratings are continuous for the duration of any power outage. No overload capacity is specified at this rating. Prime ratings are continuous per BS5514, DIN 6271, ISO-3046, and IEC 34-1 with 10% overload capacity one hour in twelve hours. All single-phase units are rated at 1.0 power factor. All 3-phase units are rated at 0.8 power factor. Contact the factory for ratings of city water-cooled and remote radiator models. Larger alternators may be used to meet special application requirements. Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler Co. generator distributor for availability. GENERAL GUIDELINES FOR DERATION: ALTITUDE: Derate 4% per 1000 ft. (305 m) elevation above 500 ft. (153 m). TEMPERATURE: Derate 1% per 10°F (5.5°C) temperature increase above 85°F (29°C).

Alternator Specifications

Specifications	Fast-Response™ Generator
Manufacturer	Kohler
Type	4-Pole, Rotating Field
Exciter type	Brushless, Permanent Magnet
Number of leads	12, Reconnectable
Voltage regulator	Solid State, Volts/Hz
Insulation: NEMA MG1-1.66,	
Material	Class H
Temperature rise	130° C, Standby
Bearing, number, type	1, Sealed
Coupling	Flexible Disc
Amortisseur windings	Full
Voltage regulation, no load to full load	±2%
One-step load acceptance per NFPA 110	100% of Rating
Peak motor starting kVA:	(35% dip for 480 V, 60 Hz and 380 V, 50 Hz)
4P7B	175 (60 Hz), 125 (50 Hz)
4P8	210 (60Hz), 145 (50Hz)

- Compliance with NEMA, IEEE, and ANSI standards for temperature rise.
- Sustained short-circuit current of up to 300% of rated current for up to 10 seconds.
- Sustained short-circuit capability enabling downstream circuit breakers to trip without collapsing the generator field.
- Self-ventilation and drip-proof construction.
- Vacuum-impregnated windings with fungus-resistant epoxy varnish for dependability and long life.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.
- Solid-state, volts-per-hertz voltage regulator with ±2% no-load to full-load regulation.
- Fast-Response™ brushless alternator with brushless exciter for excellent load response.

Application Data

Engine

Engine Specifications	60 Hz	50 Hz
Manufacturer	Ford	
Engine, model, type	CSG-649, 4-Cycle, Natural Aspiration	
Cylinder arrangement	6 In-line	
Displacement, cu. in. (L)	300 (4.951)	
Bore and stroke, in. (mm)	4.00 (102.0) x 3.98 (101.0)	
Compression ratio	8.0:1	
Piston speed, ft/min. (m/sec.)	1194 (6.06)	995 (5.05)
Main bearings: number, type	7, Copper-Lead Alloy	
Rated rpm	1800	1500
Max. power at rated rpm, hp (kW)	82 (61)	66 (49)
Cylinder head material	Iron Alloy	
Piston type and material	Autothermic Aluminum Alloy	
Crankshaft material	Nodular Cast Iron	
Valves material	Forged Steel	
Governor, type, make/model	Electronic, Barber Colman	
Frequency regulation, no load to full load	Isochronous	
Frequency regulation, steady state	±0.5%	
Air cleaner type, all models	Dry	

Exhaust

Exhaust System	60 Hz	50 Hz
Exhaust flow at rated kW, cfm (m³/min.)	420 (11.9)	350 (9.9)
Exhaust temperature at rated kW, dry exhaust, °F (°C)	1200 (649)	
Maximum allowable back pressure, in. Hg (kPa)	2.0 (6.8)	
Exhaust outlet size at hookup, in. (mm)	2.0 (51.0)	

Engine Electrical

Engine Electrical System	60 Hz	50 Hz
Ignition system	Electronic, Breakerless	
Battery charging alternator:		
Ground (negative/positive)	Negative	
Volts (DC)	12	
Ampere rating	37	
Starter motor rated voltage (DC)	12	
Recommended battery cold cranking amps (CCA) rating for 0°F (-18°C)	630	
Quantity of batteries	1	
Battery voltage (DC)	12	
Rolling current at 32°F (0°C)	-	

Fuel

Fuel System	60 Hz	50 Hz
Fuel type	Gasoline	
Fuel supply line inlet	1/8-27 NPT	
Max. lift, engine-driven fuel pump, ft. (m)	3.7 (1.1)	
Fuel filter	-	
Fuel type	LP Gas or Natural Gas Vapor	
Fuel supply line inlet	3/4-14 NPT	
Natural gas/LPG fuel supply pressure oz./in.² (in. H₂O)	4-6 (7-11)	

Lubrication

Lubricating System	60 Hz	50 Hz
Type	Full Pressure	
Oil pan capacity, qts. (L)	6.0 (5.7)	
Oil pan capacity with filter, qts. (L)	7.0 (6.6)	
Oil filter, quantity, type	1, Cartridge	

Application Data

Cooling (Standard Radiator)

Cooling System	60 Hz	50 Hz
Ambient temperature °F (°C)	105 (40)	
Engine jacket water capacity, gal. (L)	2.7 (10.2)	
Radiator system capacity, including engine, gal. (L)	5.3 (20.1)	
Engine jacket water flow, gpm (Lpm)	26 (98.4)	21 (79.5)
Heat rejected to cooling water at rated kW, dry exhaust Btu/min.	2740	2450
Water pump type	Centrifugal	
Fan diameter, including blades, in. (mm)	19.0 (483)	
Fan hp (kW)	3.0 (2.2)	1.8 (1.3)
Max. restriction of cooling air, intake and discharge side of radiator, in. H ₂ O (kPa)	0.5 (0.125)	

Cooling (Optional Systems)

High Ambient Radiator System	60 Hz	50 Hz
Ambient temperature °F (°C)	122 (50)	
Engine jacket water capacity, gal. (L)	2.7 (10.2)	
Radiator system capacity, including engine, gal. (L)	5.8 (22.0)	
Engine jacket water flow, gpm (Lpm)	30 (113.6)	25 (94.6)
Heat rejected to cooling water at rated kW, dry exhaust Btu/min.	2740	2450
Water pump type	Centrifugal	
Fan diameter, including blades, in. (mm)	19.0 (483)	
Fan hp (kW)	-	-
Max. restriction of cooling air, intake and discharge side of radiator, in. H ₂ O (kPa)	0.5 (0.125)	

Remote Radiator System*	60 Hz	50 Hz
Exhaust manifold type	Dry	
Connection sizes:		
Water inlet, in. (mm)	1.88 (48) ID Hose	
Water outlet, in. (mm)	1.50 (38) ID Hose	
Static head allowable above engine, ft. (m)	17.0 (4.32)	
*Contact your local distributor for cooling system options and specifications based on your specific application.		


City Water Cooling System	60 Hz	50 Hz
Exhaust manifold type	Dry	
System capacity, gal. (L)	4.0 (15.0)	
City water consumption, gpm (Lpm) at 50°F (10°C)	3.6 (14.0)	
Connection sizes:		
Water inlet, in.	0.5 NPT	
Water outlet, in.	0.5 NPT	

Operation Requirements

Air Requirements	60 Hz	50 Hz
Radiator-cooled cooling air, cfm (m ³ /min.)	5900 (167)	5000 (142)
Cooling air required for gen. set when equipped with CWC or remote radiator, based on 25°F (14°C) rise and ambient temp. of 85°F (29°C), cfm (m ³ /min.)	3500 (99)	3000 (85)
Combustion air, cfm (m ³ /min.)	133 (3.8)	111 (3.1)
Heat rejected to ambient air		
Engine Btu/min.	1090	920
Generator Btu/min.	420	370

Fuel Consumption	60 Hz	50 Hz
Natural Gas, cfh (m³/hr.) at % load		
100%	580 (16.4)	480 (13.6)
75%	500 (14.2)	370 (10.5)
50%	380 (10.8)	280 (7.9)
25%	250 (7.1)	200 (5.7)
LP Gas, cfh (m³/hr.) at % load		
100%	260 (7.4)	220 (6.2)
75%	210 (5.9)	170 (4.8)
50%	150 (4.2)	130 (3.7)
25%	110 (3.1)	90 (2.5)
Gasoline, gph (Lph) at % load		
100%	5.4 (20.4)	4.1 (15.5)
75%	4.2 (15.9)	3.3 (12.5)
50%	3.3 (12.5)	2.5 (9.5)
25%	2.3 (8.7)	1.8 (6.8)

Controllers



Standard Controller

Decision-Maker™ 3+, 16-Light Controller

Audio/visual annunciation with NFPA-110, Level 1 capability
Microprocessor logic with AC meters and engine gauges
Compatible with 12-volt and 24-volt engine electrical systems
Remote start, prime power, and remote annunciation capability

Optional Controllers

Decision-Maker™ 340 Controller

Audio/visual annunciation with NFPA-110, Level 1 capability
Programmable microprocessor logic with digital display
Compatible with 12-volt and 24-volt engine electrical systems
Remote start, prime power, remote annunciation, and remote communication capability

Decision-Maker™ 3+, 7-Light Controller

Audio/visual annunciation with NFPA-110, Level 2 capability
Microprocessor logic with AC meters and engine gauges
Compatible with 12-volt and 24-volt engine electrical systems
Remote start, prime power, and remote annunciation capability

Decision-Maker™ 1 Controller

Provides remote or automatic start with NFPA compliance
Uses single-light annunciation with basic control functions
Relay logic with three models—standard, standard with engine gauges, and expanded with AC meters and engine gauges
Compatible with 12-volt engine electrical systems only

Oversized Meterbox Controllers

Provides additional space for optional engine oil temperature gauge, tachometer, and wattmeter
Available with 16-light or 7-light annunciation and microprocessor logic
Same features as Decision-Maker™ 3+ controller
Compatible with 12-volt and 24-volt engine electrical systems

NOTE: See the respective controller spec sheet for additional controller features and accessories.

Accessories

Enclosed Unit

- Exhaust Silencer, Critical or Industrial
- Silencer Mounting Kit for Housing
- Tail Pipe and Rain Cap Kit
- Weather Housing

Open Unit

- Exhaust Silencer, Critical or Industrial
- Flexible Exhaust Connector, Stainless Steel

Cooling System

- Block Heater
- City Water Cooling
- High Ambient Radiator
- Radiator Duct Flange
- Remote Radiator Cooling

Fuel System

- Automatic Changeover (Natural Gas to LP Gas)
- Auxiliary Fuel Pump
- Flexible Fuel Lines (LP Gas or Gasoline)
- Gas Strainer
- LP Gas Liquid Withdrawal
- Manual Changeover Combination (LP or Natural Gas to Gasoline)
- Manual Valve and Gas Solenoid Bypass
- Secondary Gas Solenoid Valve

Electrical System

- Battery
- Battery Charger, Equalize/Float Type
- Battery Charger, Trickle Type
- Battery Heater
- Battery Rack and Cables

Engine and Generator

- Bus Bar Kits
- CSA Certification
- Generator Strip Heater
- Line Circuit Breaker
- Line Circuit Breaker with Shunt Trip
- NFPA 110 Literature
- Oil Drain Extension with Valve Kit
- Optional Generators
- Rated Power Factor Testing
- Rodent Guards
- Safeguard Breaker
- Skid End Caps
- Voltage Regulation, 1%
- Voltage Regulator Sensing, Three-Phase

Maintenance

- General Maintenance Literature Kit
- Maintenance Kit (includes standard air, oil, and fuel filters)
- Overhaul Literature Kit

Controller (Standard Controller)

- Common Failure Relay Kit
- Customer Connection Kit
- Decision Monitor™ Remote Annunciator Panel
- Dry Contact Kit (Isolated Alarm)
- Extension Wiring Harness for Remote Mounting of Controller
- FASTCHECK® Diagnostic Fault Detector
- Prealarm Sender Kit
- Remote Audio/Visual Alarm Panel
- Remote Emergency Stop Kit
- Run Relay Kit
- Tachometer Kit/Oversize Meterbox
- Wattmeter Kit/Oversize Meterbox


Miscellaneous Accessories

- _____
- _____
- _____
- _____
- _____
- _____
- _____
- _____
- _____
- _____

WEIGHTS AND DIMENSIONS

Overall Size, L x W x H, in. (mm): 88.25 x 29.0 x 41.69
 (2242 x 737 x 1059)

Weight (Radiator Model), wet lb. (kg): 1510 (685)

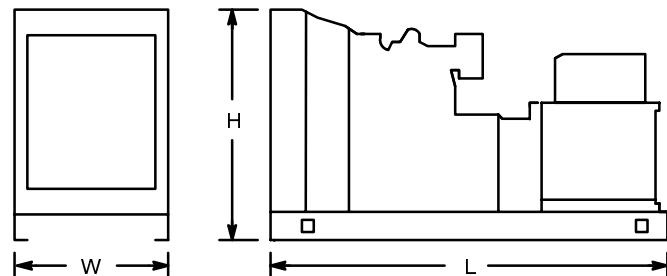

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY:

© Kohler Co., 1993, 1994, 1995, 1996, 1998, 1999. All rights reserved.